
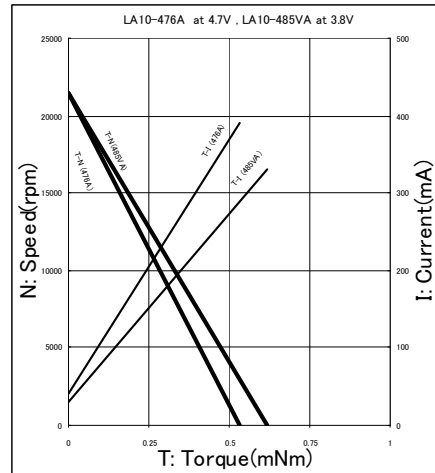



- Length variation (11.1mm, 12.5mm, 15mm, 20mm)
- RoHS Compliant

LA10-462F

Model	Rated Voltage DC	Rated Current (mA)	Stall Current (mA)	Rated Torque		Stall Torque		Rated Speed (rpm)	No Load Speed (rpm)
				oz-in	mNm	oz-in	mNm		
LA10-478B	5	40	100	0.028	0.196	0.085	0.6	4200	6250
LA10-462F	5	85	240	0.028	0.196	0.099	0.7	9350	13000
LA10-476A	4.7	125	330	0.028	0.196	0.088	0.62	14700	21500
LA10-485VA	3.8	170	390	0.028	0.196	0.075	0.53	13000	21500

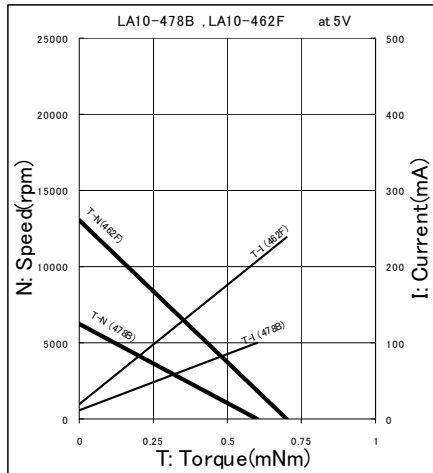

Outline Dimensions (mm)

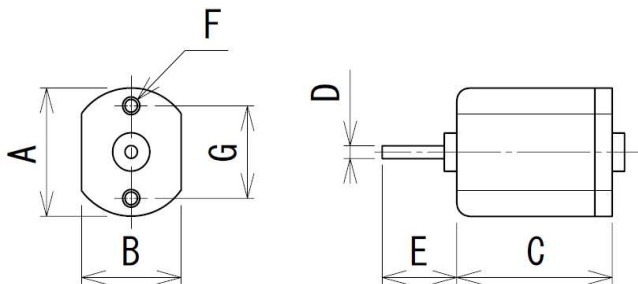

Model	A	B	C	D	E	F	G
LA10-478B	φ 10	8	20	φ 1	4	M1.4	7.2
LA10-462F	φ 10	8	15	φ 1	4	M1.4	7.2
LA10-476A	φ 10	8	12.5	φ 1	6.8	M1.2	7.4
LA10-485V	φ 10	8	11.1	φ 1	3.6	M1.4	6.95

Nidec Copal (U.S.A.) Corp.
 373 Van Ness Ave Suite 130
 Torrance, CA 90501
 Tel: (310) 782-6102
 Fax: (310) 782-6821
www.nidec-copal-usa.com
info@nidec-copal-usa.com